


# KINFLEX MODEL BFMC-MTE FLEXIBLE CONNECTOR

KINFLEX BFMC-MTE, FLEXIBLE CONNECTOR SPECIFICATIONS															
NOM SIZE		LENGTH-L		PIPE THREAD		LATERAL OFFSET				WORKING PRESSURE				APPROX. SHIP. WEIGHT	
						INTERMITTENT		PERMANENT		@70° F		@300° F			
0.50	(13)	10.00	(254)	0.50	(13)	0.25	(6)	0.50	(13)	450	(31.0)	373	(25.7)	1.0	(0.5)
0.75	(19)	10.00	(254)	0.75	(19)	0.25	(6)	0.50	(13)	370	(25.5)	307	(21.2)	1.0	(0.5)
1.00	(25)	10.00	(254)	1.00	(25)	0.25	(6)	0.50	(13)	250	(17.2)	207	(14.3)	1.0	(0.5)
1.25	(32)	10.00	(254)	1.25	(32)	0.25	(6)	0.50	(13)	200	(13.8)	166	(11.4)	2.0	(0.9)
1.50	(38)	12.00	(305)	1.50	(38)	0.25	(6)	0.50	(13)	200	(13.8)	166	(11.4)	3.5	(1.6)
2.00	(51)	14.00	(356)	2.00	(51)	0.25	(6)	0.50	(13)	170	(11.7)	141	(9.7)	5.0	(2.3)
										PSI	(BAR)	PSI	(BAR)	LB	(KG)

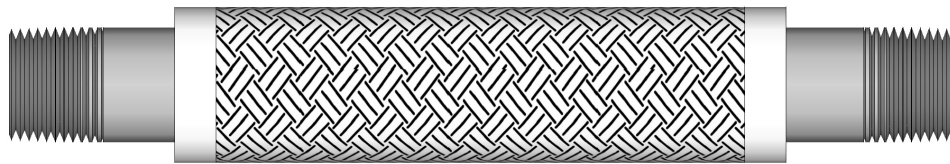

KINFLEX BFMC-MTE

**WARNING:** CONTROL UNITS MUST BE USED TO PROTECT THIS PART FROM EXCESSIVE MOVEMENT IF PIPING IS NOT PROPERLY ANCHORED.

ALL DIMENSIONS IN INCHES (MM) EXCEPT AS NOTED.

**MATERIALS**

PIPE ENDS: CARBON STEEL  
CORRUGATED HOSE: BRONZE WITH BRAIDED BRONZE SHEATH



By: BB

Date: 07/14/14

Revised: /

Drawing No:

S-05.05-01H