
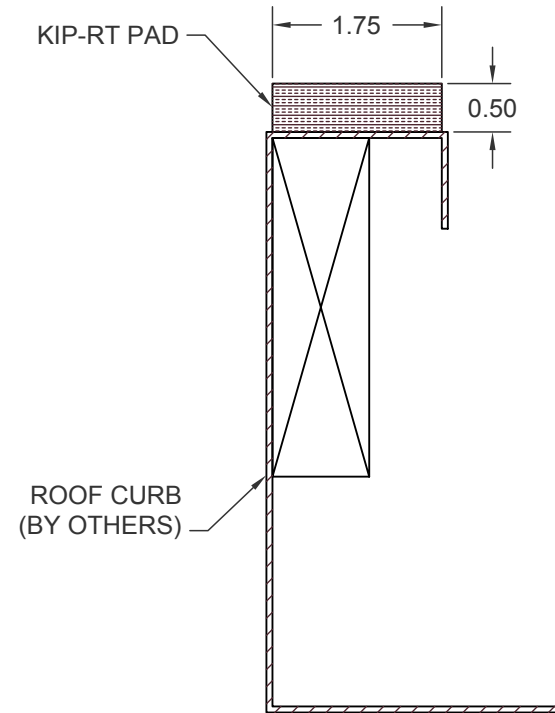


**NOTE:**

ENLARGED PORTION OF CURVE INDICATES LOAD RANGE FOR STEADY STATE LOADS.  
 FOR IMPACT OR SHOCK LOADS, REDUCE THIS LOADING BY 50%.

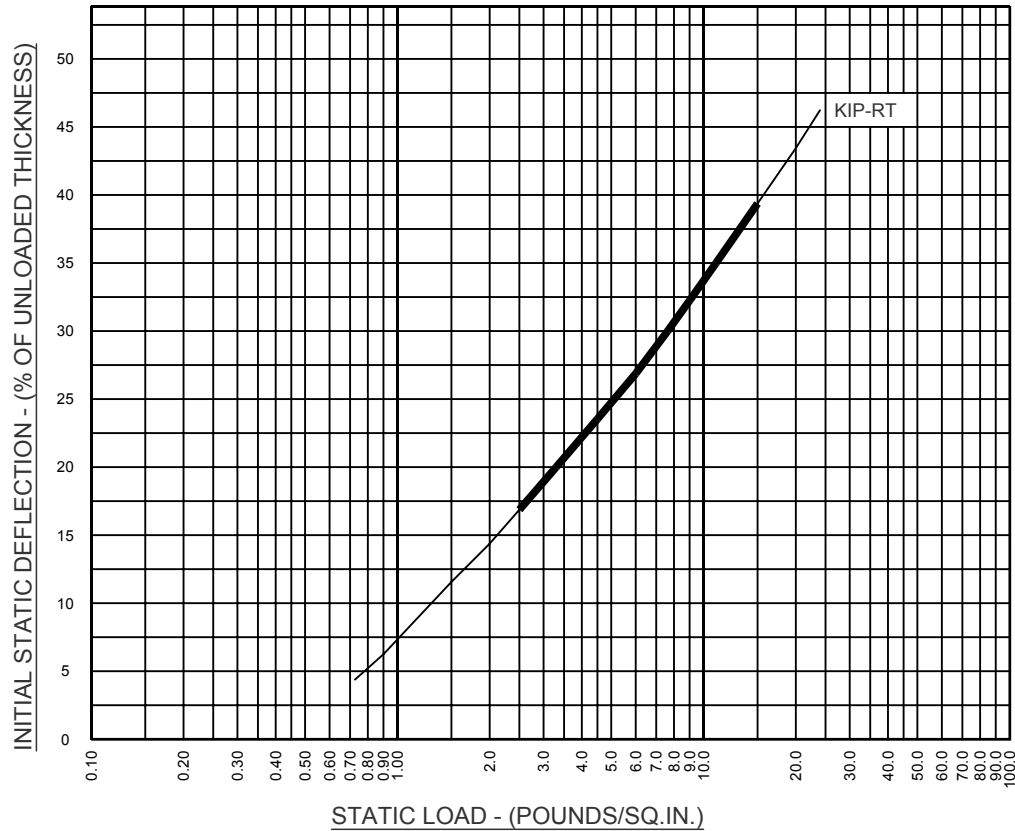

**CURB CROSS SECTION**

**\* NOTE:**

FIBER GLASS PAD IS SUPPLIED IN 48 INCH LONG LENGTHS.  
 FIELD CUT TO FIT TOP OF CURB, AND ADHERE FIBER GLASS  
 PAD TO CURB WITH A MASTIC ADHESIVE. (I.E., "LIQUID NAILS"  
 OR SIMILAR). EXPOSED CUT EDGES OF FIBER GLASS ARE TO  
 BE SEALED WITH A HIGH QUALITY SILICONE CAULK. ADHESIVE  
 AND CAULK TO BE PROVIDED BY OTHERS.



KINETICS NOISE CONTROL, INC  
 6300 IRELAN PL,  
 DUBLIN, OH 43017 USA  
 Ph: 614 889-0480, Fax: 614 889-0540  
 www.kineticsnoise.com

Model:  
**KIP-RT ROOFTOP  
 FIBERGLASS PAD**

By: **BB**  
 Date: **03/01/04**  
 Revised: **09/30/15 / BB**

Drawing No:  
**S-21.00-5A**