



## **KINETICS® Hi-Tack** TACKABLE WALL PANELS

Hi-Tack Wall Panels are ideal for applications requiring high tackability. Choose from a wide array of fabrics for your tackable walls.

These non-acoustical fabric covered wall panels are the ideal solution for highly tackable wall surfaces in conference rooms, offices, hallways, and classrooms.

Hi-Tack panels are constructed from 1/2", or 3/4" thick 24 PCF density mineral board wrapped in your choice of fabrics from the FR 701 Collection from Guilford of Maine or factory-approved, customer provided materials.

When paired with HardSide acoustical panels, Hi-Tack provides highly tackable wall surfaces that blend visually with sound absorbing panels.

# Hi-Tack - Tackable Wall Panels

## DESCRIPTION


Highly tackable fabric faced wall panel.

## COMPOSITION

1/2", or 3/4" 24 PCF mineral board

Wrapped in fabric from Guilford of Maine or factory-approved, customer-selected material.

Available in panel sizes up to 4 ft x 10 ft (1/2" thickness) or 4 ft x 8 ft (3/4" thickness).

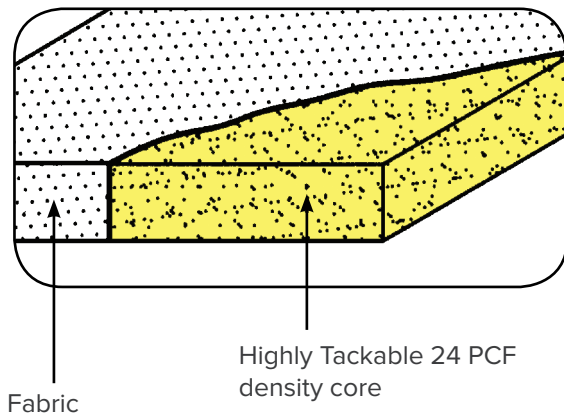

## FIRE TEST DATA

Class A per ASTM E84

## APPLICATIONS

- Spaces requiring high tackability
- Classrooms
- Offices
- Lobbies and Corridors

## MOUNTING

DS90 Impaling Clips and Adhesive

Magnetic Strips - movable

Velcro - movable

Z-Clips - movable

## EDGE OPTIONS

Square



Bevel



Radius



Pencil



[kineticsnoise.com](http://kineticsnoise.com)  
[sales@kineticsnoise.com](mailto:sales@kineticsnoise.com)  
1-800-959-1229