




BAFFLE LENGTH (FT.)	MINIMUM DROP (IN.)
10	3
15	6
20	12
25	18
30	24




-LOCATE WAVE BAFFLE ACCORDING TO ARCHITECT'S PLANS. ATTACH BAFFLE TO METAL CEILING UTILIZING #10 SELF-TAPPING SHEET METAL SCREWS AND FENDER WASHERS (SUPPLIED BY OTHERS) THROUGH WOOD STRIPS PROVIDED IN BAFFLE.
 -ON A 30' LONG WAVE BAFFLE, ALLOW A MINIMUM OF 24" DROP AT CENTER OF BAFFLE. CONTACT FACTORY FOR OTHER MOUNTING RECOMMENDATIONS.

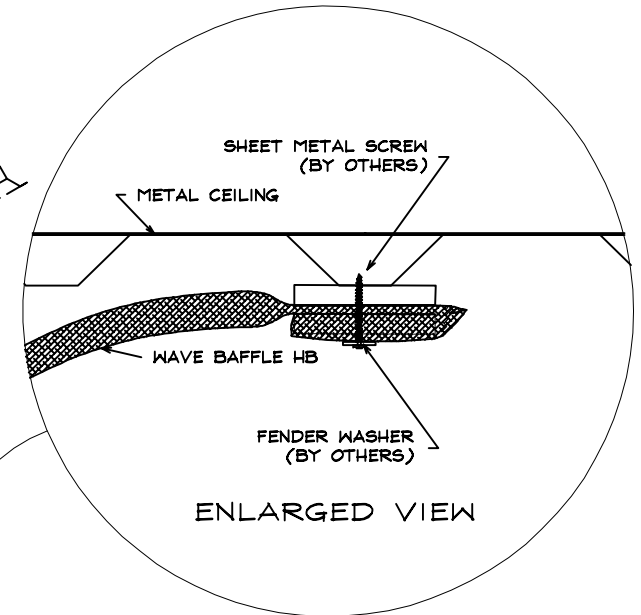

EXAMPLE OF 30' BAFFLE INSTALLATION

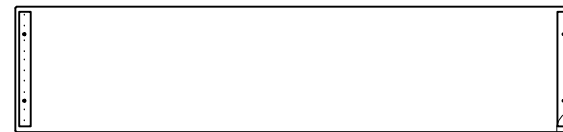

WAVE BAFFLE HB, TOP VIEW

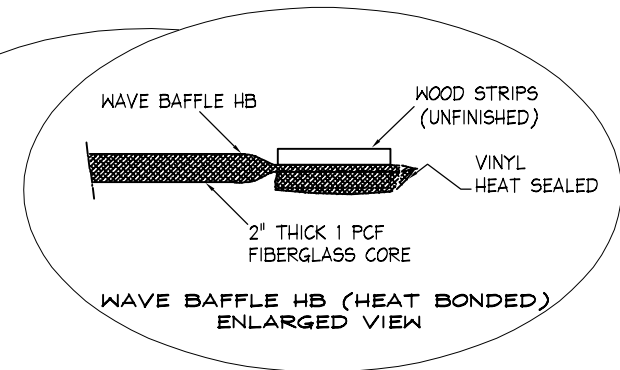

WAVE BAFFLE HB (HEAT BONDED)
ENLARGED VIEW