


WAVE CEILING HANGER

IP UNITS (INCHES [mm] & POUNDS [kg])

TYPE	A	B	C	D
WAVE 22	8.50 [216]	1.25 [32]	0.91 [23]	1.50 [38]
WAVE 44	8.50 [216]	1.25 [32]	0.91 [23]	1.50 [38]

STANDARD RATINGS

TYPE	SIZE	FINISH	LOAD LB [KG]	DEFL. inches [mm]	RECOMMENDED LAYERS OF DRYWALL
WAVE	22	ZINC	22 [10]	0.44 [11]	2
WAVE	44	BLACK PHOSPHORUS	44 [20]	0.44 [11]	2

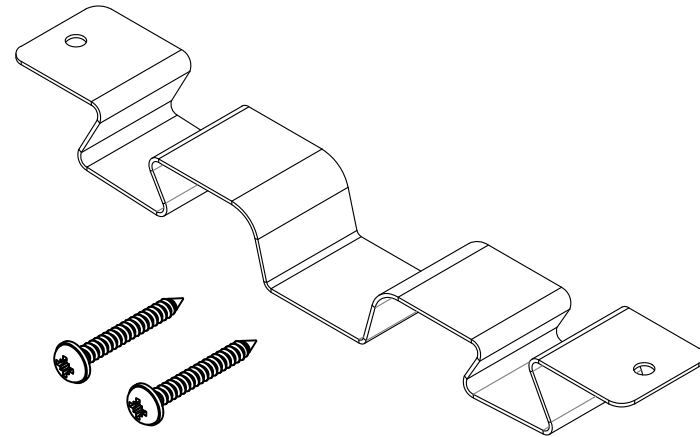


INSTALLATION NOTE:

WAVE CEILING HANGERS ARE FOR USE ON FLAT, LEVEL CEILINGS AND SHALL NOT BE USED FOR CEILINGS SUPPORTING SOFFITS, BOX-OUTS, ELEVATION CHANGES, OR SUPPORTED EQUIPMENT/MATERIALS BEYOND FURRING CHANNEL AND GYPSUM BOARD. IF ONE OR MORE OF THESE SITUATIONS APPLY TO THE PROJECT, CONTACT YOUR LOCAL SALES REPRESENTATIVE FOR ALTERNATIVE PRODUCT RECOMMENDATIONS OR ISOLATED CEILING DETAILING ASSISTANCE.



SPECIFICATIONS:

- HANGER FOR INSTALLATION ON WOOD ONLY.
- HANGER BRACKETS WILL SUPPORT 50% OVERLOAD BEFORE YIELD.
- HANGER BRACKETS WILL CARRY (5) TIMES OVERLOAD WITHOUT ULTIMATE FAILURE.

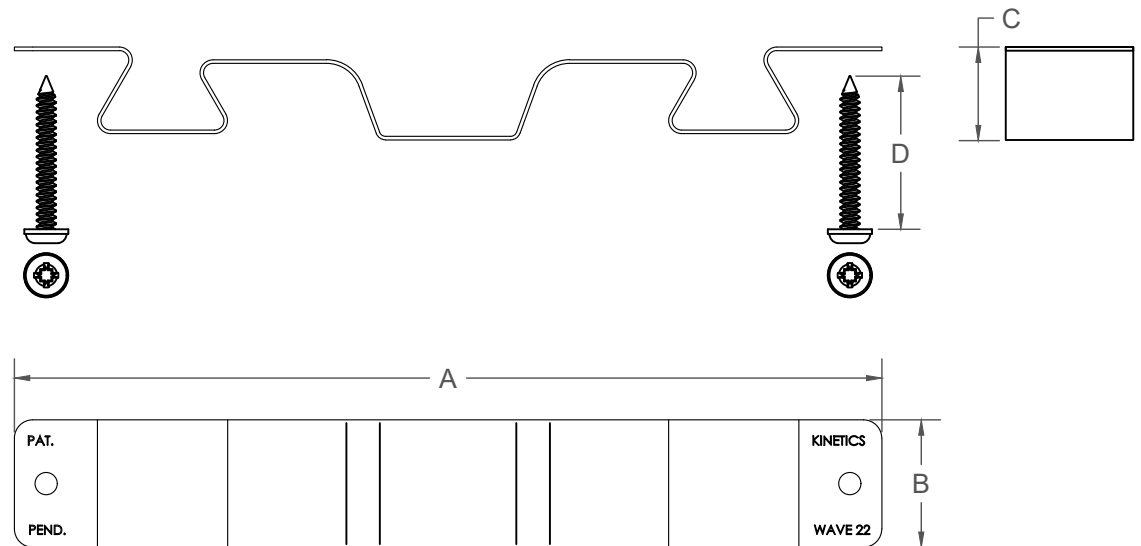

DIMENSION FORMAT: IN [mm]

SCALE: NTS



WAVE CEILING HANGER

Revised
10/09/2020

Drawing No.
AA002047

kineticsnoise.com/wave-hanger