



kleen[®]
PET Products by KINETICS

kleen Panel Absorptive Panel

ORIGIN – the building blocks of the kleen lineup.

The unpainted canvas of building design and acoustical treatment. These 48" x 96" panels come in a variety of thicknesses and a plethora of colors that can be cut to meet your project needs. Get creative!



What is kleen?

The kleen family of products feature recycled PET, offering ultra-low VOC emissions and bleach cleanability. The material is formaldehyde free and 100% recyclable. kleen balances acoustical design with an emphasis on environmental wellness. Harmony you can see and hear.

kleen Panel Absorptive Panel

FEATURES

- Resists mold, mildew & bacteria
- High tackability
- Impact resistant
- Hypoallergenic, dust-free & formaldehyde-free
- Easy to handle & simple to apply

COMPOSITION

- 100% Polyethylene Terephthalate (PET)
- 55% recycled content

ENVIRONMENTAL FACTORS

- 100% recyclable
- No formaldehyde VOC emissions
- ASTM – D5116
- LEED credit applicable

SPECIFICATIONS

Height:
48"

Width:
96"

Thickness Options:
3/8" / 1/2"

Weight per Square Foot:
3/8" — .27 lb.
1/2" — .44 lb.

Quantity per Box:
3/8" — 12 sheets per box
1/2" — 10 sheets per box


Fire Rating:
ASTM E-84, Class A

AVAILABLE COLORS

3/8"



1/2"

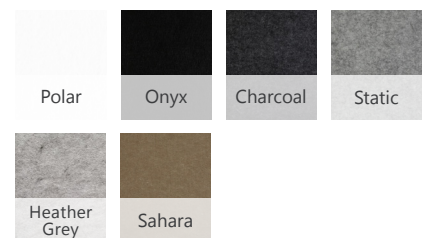

ACOUSTICAL DATA

Frequency (Hz)	125	250	500	1K	2K	NRC	SAA
Panel (3/8")	.04	.04	.16	.40	.63	.30	.32
Panel (3/8" w/ 2" spacer)	.07	.13	.42	.79	.89	.55	.56
Panel (3/8" w/ 4" spacer)	.14	.32	.73	.92	.72	.65	.68
Panel (1/2")	.01	.07	.26	.54	.78	.40	.41
Panel (1")	.07	.28	.63	.87	.99	.70	.69
Panel (2")	.31	.58	1.08	1.11	1.04	.95	.93

Tested following ASTM C423 using "A" and "F" mounting



Declare.



1" & 2"



kineticsnoise.com/kArrow
sales@kineticsnoise.com
1.800.959.1229



A CATALYST ACOUSTICS GROUP COMPANY