
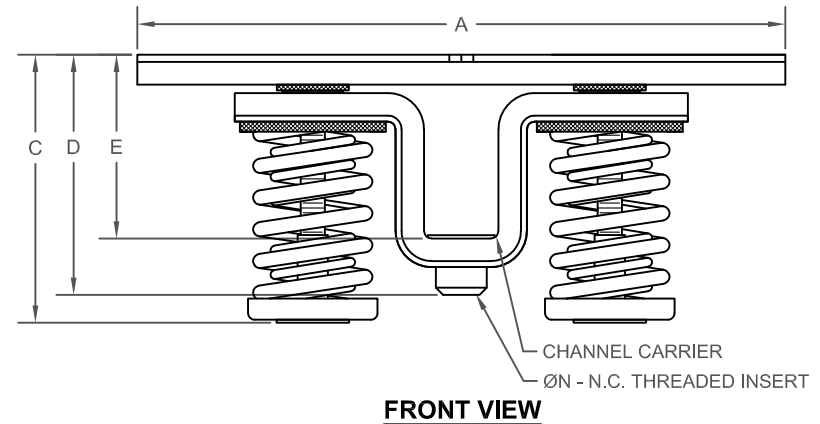
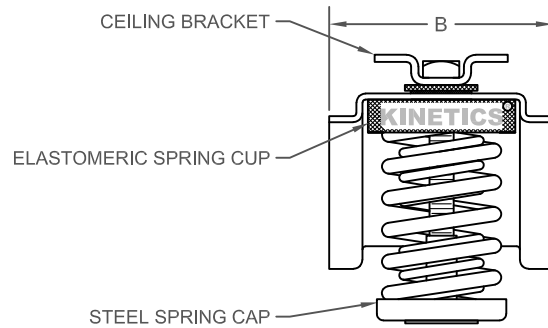


KSCH-22/223 1" DEFLECTION ISOLATION HANGERS

IP UNITS (INCHES AND POUNDS) SI UNITS [MM AND KG]

A	B	C	D	E	F	G	H	J	K	ØL	ØM	ØN
6.75 [171.5]	2.31 [58.7]	2.81 [71.4]	2.50 [65.3]	1.93 [49]	1.00 [25.4]	0.19 [4.8]	5.75 [146]	0.50 [12.7]	1.38 [35.1]	0.44 [11.2]	0.20 [5]	0.38 [9.7]

MODEL	SPRING COLOR		RATED	
			LOAD	DEFL.
	OUTER	INNER	LBS [KG]	IN [MM]
KSCH-22	GRAY		22.00 [10]	0.99 [25.2]
KSCH-35	BLUE		35.00 [15]	0.99 [25.2]
KSCH-48	BLACK		48.00 [21.8]	1.00 [25.4]
KSCH-73	GRAY	SILVER	73.00 [33.1]	1.00 [25.4]
KSCH-90	BROWN		90.00 [40.8]	1.00 [25.4]
KSCH-120	ORANGE		120.00 [54.4]	1.00 [25.4]
KSCH-140	BROWN	SILVER	140.00 [63.5]	1.00 [25.4]
KSCH-172	RED		172.00 [78]	1.00 [25.4]
KSCH-223	RED	SILVER	223.00 [101.2]	1.00 [25.4]

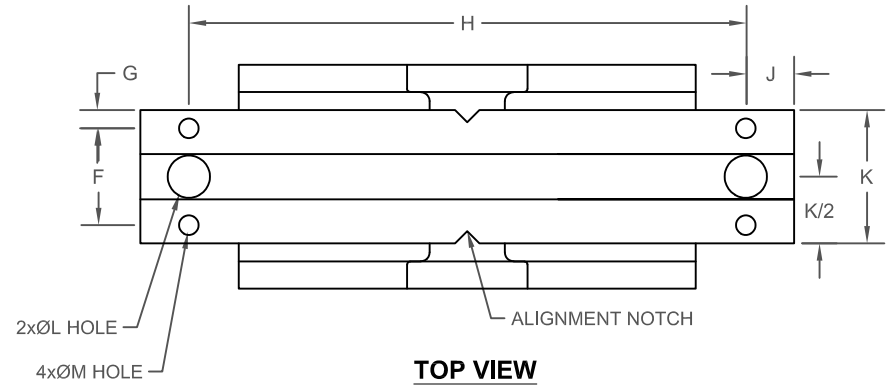

- SPRING CAPACITIES HAVE A TYPICAL OVERLOAD CAPACITY OF 50%.
- HANGER BRACKET WILL CARRY (5) TIMES OVERLOAD WITHOUT FAILURE.
- HANGER BRACKETS ARE ELECTRO-ZINC PLATED.
- SPRING COILS ARE POWDER COATED.
- SPRING COILS ARE SHIPPED PRE-LOADED 3/8".

SCALE: 6" = 1'-0"



KSCH UNISTRUT OR ANCHOR
INSTALLATION BRACKET

Revised
01/09/2020

Drawing No.
AA001975

kineticsnoise.com/ksch