


RATED LOAD POUNDS	SPRING COLOR	RATED DEFLECTION INCHES	DIMENSIONS IN INCHES					
			A	B	C	D	E	F
SRPH-2-2000	ORANGE	2.11	6.00	12.00	6.00	1.00	7.00	1.25
SRPH-2-2500	BLUE	2.12	6.00	12.00	6.00	1.00	7.00	1.25

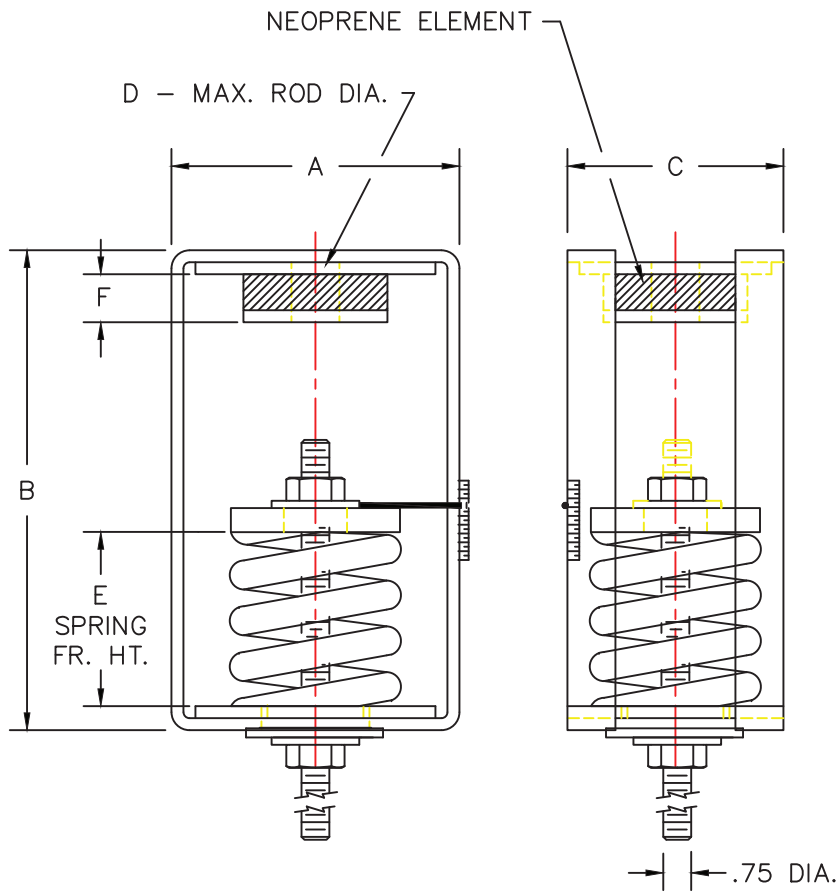

SRPH-2 ISOLATION HANGERS HAVE A MINIMUM K_x/K_y OF 1.4
 SRPH-2 SPRING ELEMENTS ARE SAFE FOR SOLID LOADING
 SRPH-2 HANGER BRACKETS WILL CARRY (5) TIMES OVERLOAD WITHOUT FAILURE
 SRPH-2 HANGER BRACKETS WILL ALLOW 30° ROD MISALIGNMENT WITHOUT SHORT CIRCUITING
 SRPH-2 SPRING ELEMENTS AND BRACKETS ARE PAINTED LOAD PLATES ARE BRIGHT ZINC PLATED.