



# LDR 25 mm DEFLECTION ISOLATION RAIL SET

S-I UNITS (mm AND kg)

TYPE	L	W	A	B	D	E	F	G	H	T	Z1	Z2
1-120/820	146	76	38	13	11	41	21	51	110	6	13	10

STANDARD RATINGS		SPRING COIL			SYSTEM RATED	
TYPE	SIZE	COLOR	HT.	O.D.	LOAD	DEFL.
LDR	1-120	BLUE	64	37	54	25
LDR	1-260	GREEN	64	37	118	25
LDR	1-480	GRAY	64	37	218	24
LDR	1-820	BROWN	64	37	372	24

STRUT CHANNEL OPTIONS	
OPTION	LENGTH (mm)
B	610
C	1219

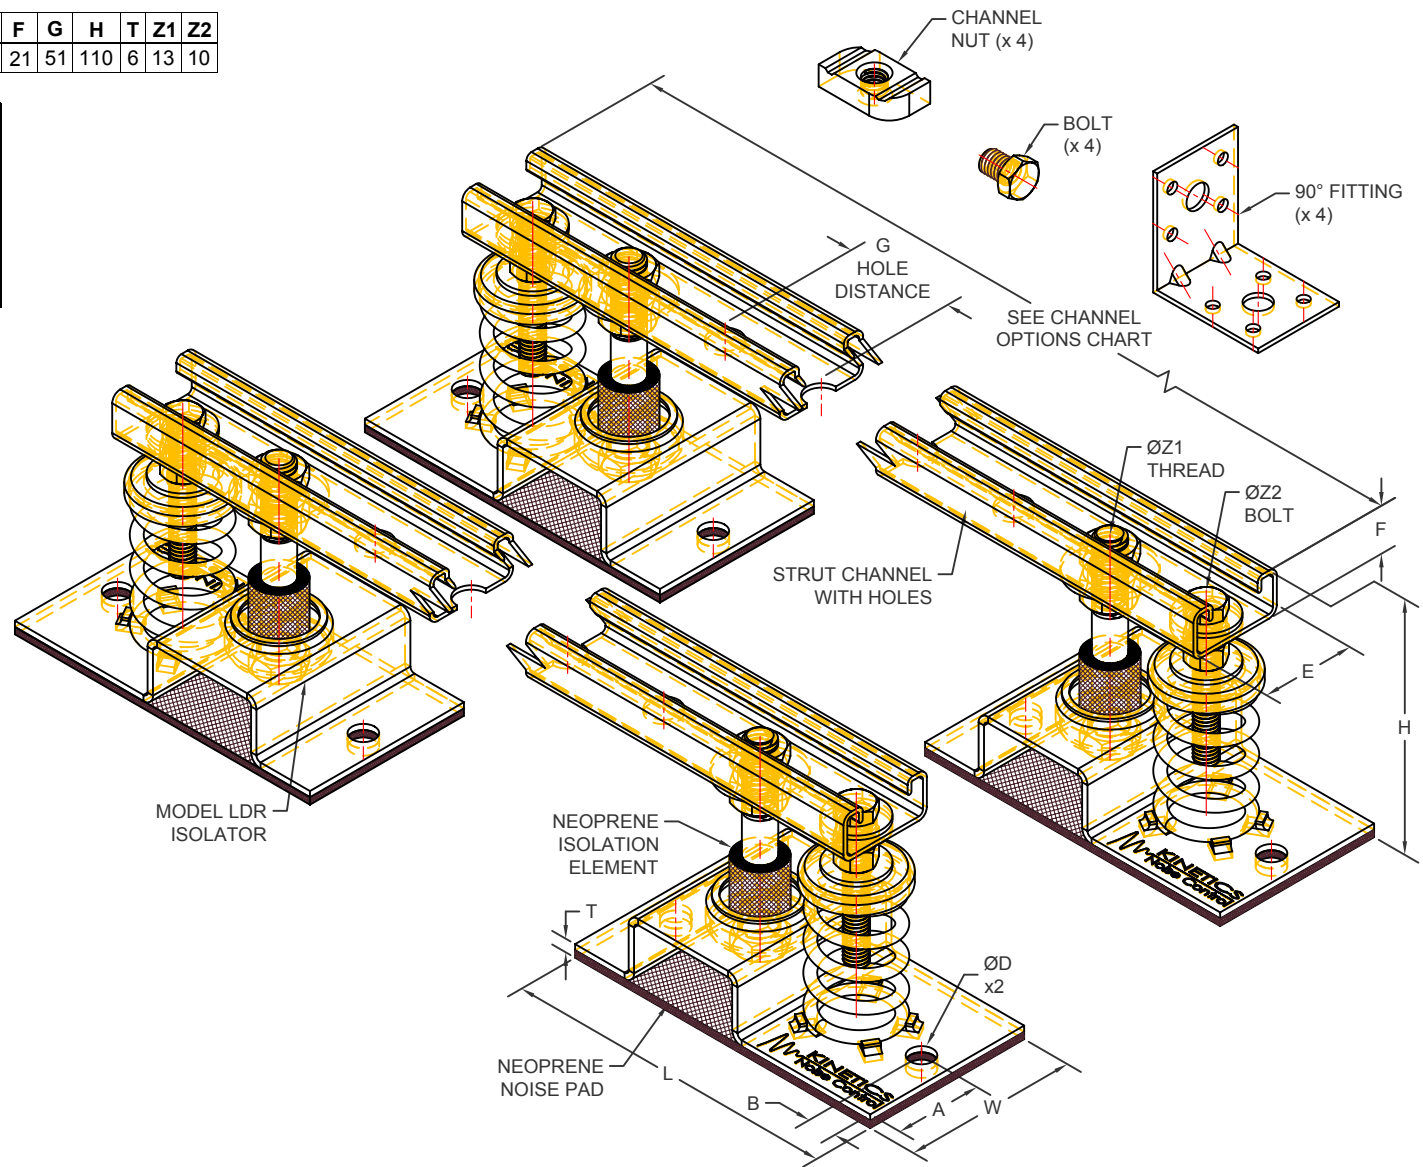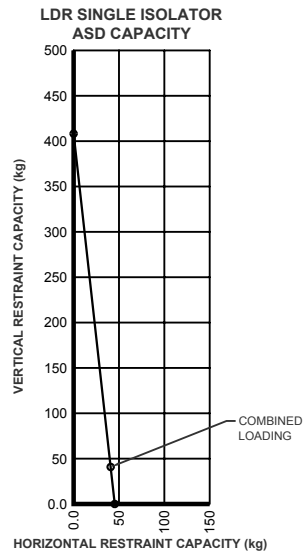

**SPECIFICATIONS:**

- ALL HARDWARE IS BRIGHT ZINC PLATED.
- HOUSING IS ZINC PLATED STEEL.
- SPRING COILS ARE POWDER COATED STEEL.
- ALL ELEMENTS ARE SAFE AT SOLID LOADING.
- LDR ISOLATION RAILS ARE TYPICALLY SOLD IN PAIRS.
- LDR ISOLATORS ARE DESIGNED TO BE USED WITH STANDARD UNISTRUT P4100 HS CHANNEL OR EQUAL.
- STRUT CHANNEL USES STANDARD CHANNEL NUTS WHICH CAN BE PURCHASED SEPARATELY.



KINETICS NOISE CONTROL, INC  
 6300 IRELAN PL,  
 DUBLIN, OH 43017 USA  
 Ph: 614 889-0480, Fax: 614 889-0540  
 www.kineticsnoise.com

Model:  
**LDR-1-120/820  
 ISOLATION SET**

By: **BB**  
 Date: **01/23/17**  
 Revised: **02/05/18 / BB**

Drawing No:  
**S-01.19-10  
 METRIC**