

FMS 2" DEFLECTION ISOLATOR
IP UNITS (INCHES AND POUNDS)

TYPE	W	H	T	Z
2-100/1975	4.38	TABLE 2	0.38	TABLE 2


STANDARD RATINGS	SPRING COIL						
	COLOR		FREE HT.	O.D.	RATED		DEFL.
	OUTER	INNER			LOAD	DEFL.	
2-100	GRAY		6.09	3.50	100	2.00	
2-135	BEIGE		6.09	3.50	135	2.00	
2-185	BROWN		6.09	3.50	185	2.00	
2-225	GRAY	BROWN	6.09	3.50	225	2.00	
2-250	BLUE		6.09	3.50	250	2.00	
2-375	BLUE	BROWN	6.09	3.50	375	2.00	
2-500	GREEN		6.09	3.50	500	2.00	
2-625	GREEN	BROWN	6.09	3.50	625	2.00	
2-750	BLACK		6.09	3.50	750	2.00	
2-875	BLACK	BROWN	6.09	3.50	875	2.00	
2-995	ORANGE		6.09	3.50	995	2.00	
2-1120	ORANGE	BROWN	6.09	3.50	1120	2.00	
2-1400	ORANGE	GREEN	6.09	3.50	1400	2.01	
2-1600	RED		6.09	3.50	1600	2.00	
2-1975	RED	GREEN	6.09	3.50	1975	1.98	

TABLE 2

USE WITH RESTRAINT	DIMENSION	
	H	Z
FMSA	7.66	0.50
FMSB	7.66	0.50
FMSC	7.66	0.50
FMSD	7.66	0.50
FMSE	7.66	0.50

SPECIFICATIONS:

- FREE STANDING COIL SPRING ISOLATOR.
- POWDER COATED SPRING ELEMENTS.
- OTHER METALLIC COMPONENTS ARE BRIGHT ZINC PLATED.
- MINIMUM OVERLOAD OF 50%.
- MINIMUM Kx/Ky RATIO OF 1.0.
- ALL ELEMENTS ARE SAFE AT SOLID LOADING.
- ALL THREADED MEMBERS ARE AMERICAN STANDARD.

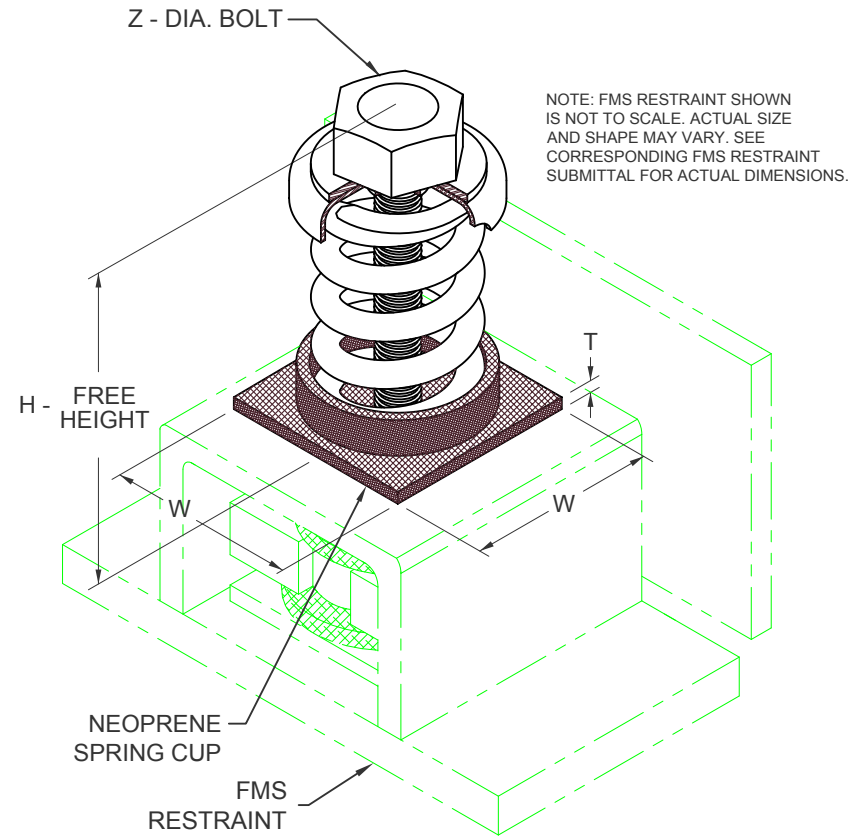

KINETICS NOISE CONTROL, INC
6300 IRELAN PL,
DUBLIN, OH 43017 USA
Ph: 614 889-0480, Fax: 614 889-0540
www.kineticsnoise.com

Model:
FMS-2-100/1975

By: **JMJ**
Date: **10/21/03**
Revised: **10/29/18 / BB**

Drawing No:
S-01.40-21