


FMS 2" DEFLECTION ISOLATOR

IP UNITS (INCHES AND POUNDS)

TYPE	L	W	T	A	H	Z
2-5000/9000	13.38	7.25	0.22	8.17	9.88	2.25

STANDARD RATINGS				SPRING DATA					APPLICABLE MODELS
TYPE	SIZE	LOAD	DEFL.	COLOR			FREE HT.	O.D.	
FMS	2-5000	5000	2.00	BLUE			7.00	5.00	C/D/E
FMS	2-5500	5500	2.00	BLUE	BLUE		7.00	5.00	C/D/E
FMS	2-6050	6050	2.02	BLUE	GREEN		7.00	5.00	C/D/E
FMS	2-6500	6500	2.00	BLUE	BLACK		7.00	5.00	C/D/E
FMS	2-7000	7000	2.00	BLUE	ORANGE		7.00	5.00	D/E
FMS	2-7800	7800	2.00	BLUE	ORANGE	GREEN	7.00	5.00	D/E
FMS	2-8200	8200	2.00	BLUE	RED		7.00	5.00	D/E
FMS	2-9000	9000	2.00	BLUE	RED	GREEN	7.00	5.00	D/E

NOTE: FMS RESTRAINT SHOWN IS NOT TO SCALE. ACTUAL SIZE AND SHAPE MAY VARY. SEE CORRESPONDING FMS RESTRAINT SUBMITTAL FOR ACTUAL DIMENSIONS.

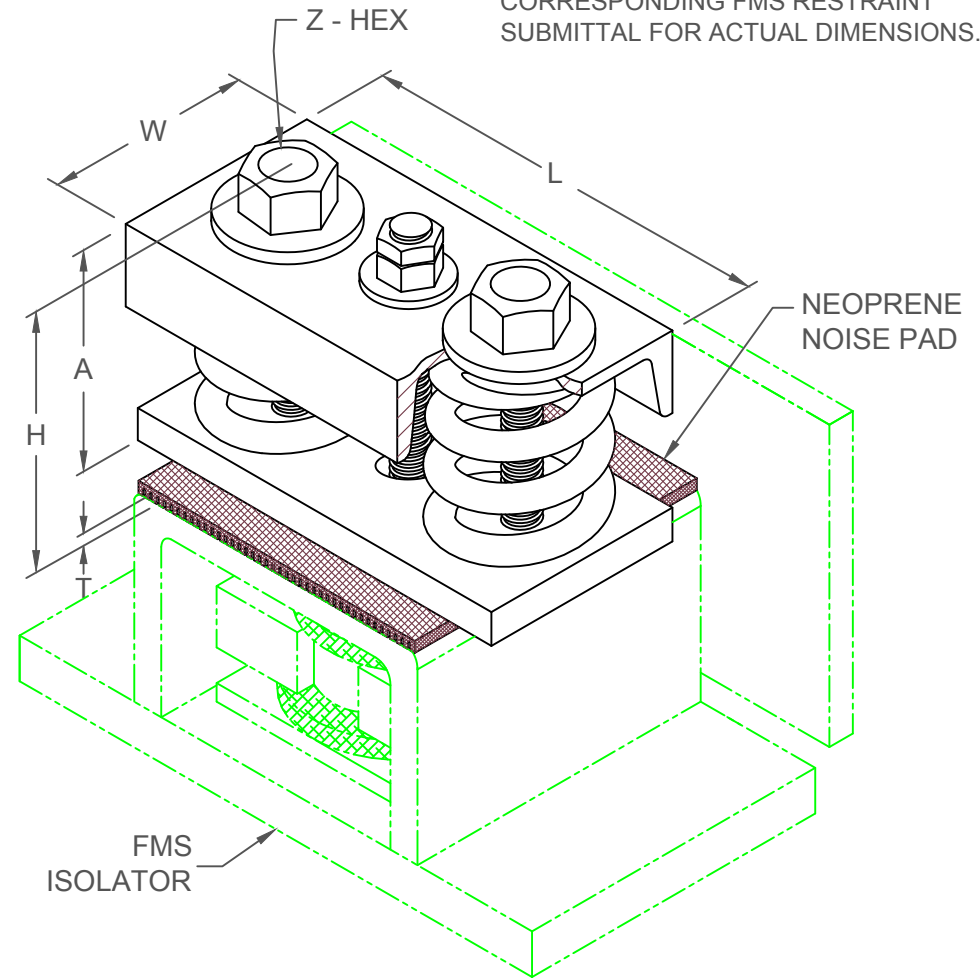

SPECIFICATIONS:

- FREE STANDING COIL SPRING ISOLATOR.
- POWDER COATED SPRING ELEMENTS AND LOAD PLATES.
- OTHER METALLIC COMPONENTS ARE BRIGHT ZINC PLATED.
- MINIMUM OVERLOAD OF 50%.
- MINIMUM K_x/K_y RATIO OF 1.0.
- ALL ELEMENTS SAFE AT SOLID LOADING.
- ALL THREADED MEMBERS ARE AMERICAN STANDARD.



KINETICS NOISE CONTROL, INC
 6300 IRELAN PL,
 DUBLIN, OH 43017 USA
 Ph: 614 889-0480, Fax: 614 889-0540
 www.kineticsnoise.com

Model:
FMS-2-5000/9000

By: **JMJ**
 Date: **10/21/03**
 Revised: **03/09/11 / BB**

Drawing No:
S-01.40-23