

ISOMAX UNIBRACE L



IP UNITS (INCHES AND POUNDS)

A	B	C	D	E	F	G	H	J	K	L	M
3.86	3.15	1.45	0.22	3.11	0.80	2.53	1.78	0.89	0.84	0.28	0.61

ISOMAX UNIBRACE L

MAX. LOADING (LBS)

SHEAR	TENSILE
35.0	50.0

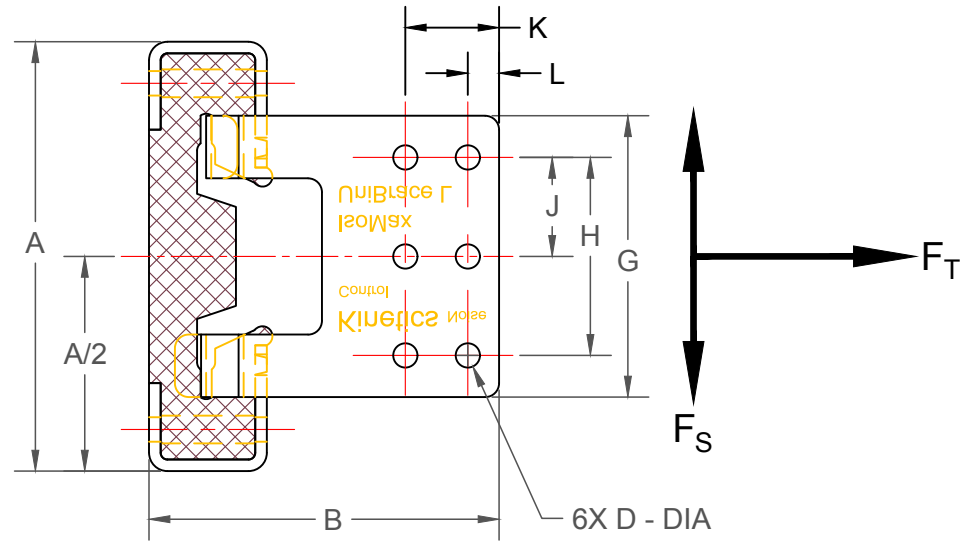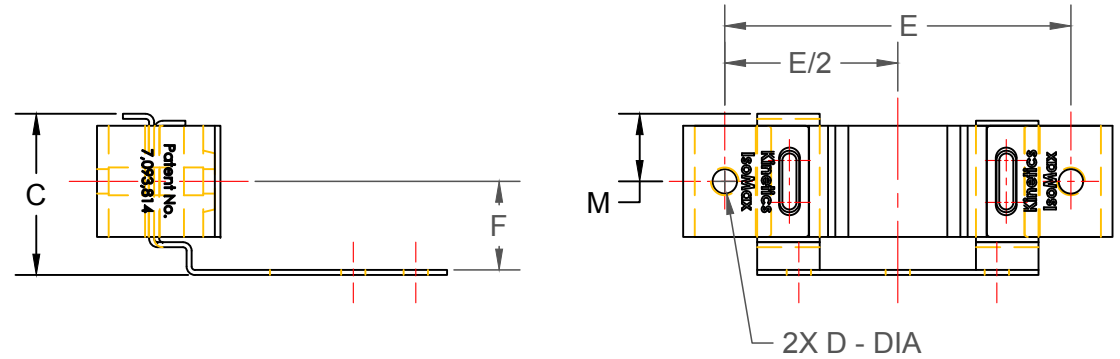

NOTE:
UNIT SHIPS UNASSEMBLED.

SPECIFICATIONS:

- METAL COMPONENTS ARE PRE-GALVANIZED STEEL.
- ISOLATION ELEMENT IS NEOPRENE.



KINETICS NOISE CONTROL, INC
6300 IRELAN PL,
DUBLIN, OH 43017 USA
Ph: 614 889-0480, Fax: 614 889-0540
www.kineticsnoise.com

Model:
UNIBRACE L

By: BB
Date: 03/16/11
Revised: /

Drawing No:
S-02.07-02