

SFH 25 mm DEFLECTION ISOLATION HANGERS


S-I UNITS (mm AND kg)

TYPE	L	H	W	A	D _{MAX}
1-35/370	29	187	94	57	16
1-500/805	32	187	94	57	16

STANDARD RATINGS				SPRING COIL				FIBERGLASS INSERT DENSITY
TYPE	SIZE	LOAD	DEFL.	COLOR		FREE HT.	O.D.	
SFH	1-35	16	44	BLUE		81	44	G
SFH	1-70	32	41	GREEN		81	44	G
SFH	1-125	57	40	GRAY		81	44	G
SFH	1-245	111	37	BROWN		81	44	L
SFH	1-370	168	28	ORANGE		81	44	Q
SFH	1-500	227	27	BEIGE		81	44	R
SFH	1-600	272	27	CHROME		81	44	R
*SFH	1-700	318	28	BEIGE	WHITE	81	44	R
*SFH	1-805	365	28	CHROME	WHITE	81	44	R

SPECIFICATIONS:

- SPRING ELEMENTS AND HOUSING ARE POWDER COATED,
- LOAD PLATES ARE BRIGHT ZINC PLATED.
- ISOLATION HANGERS HAVE A TYPICAL OVERLOAD OF 50%.
- ISOLATION HANGERS HAVE A MINIMUM K_x/K_y RATIO OF 1.0.
- SPRING ELEMENTS ARE SAFE AT SOLID LOADING.
- HANGER BRACKETS WILL CARRY AT LEAST (5) TIMES OVERLOAD WITHOUT FAILURE.
- HANGER BRACKETS WILL ALLOW 30° ROD MISALIGNMENT WITHOUT SHORT CIRCUITING EXCEPT AS NOTED.*
- ISOLATION HANGERS INCORPORATE "NO SHORT" STEP SPRING CAP.

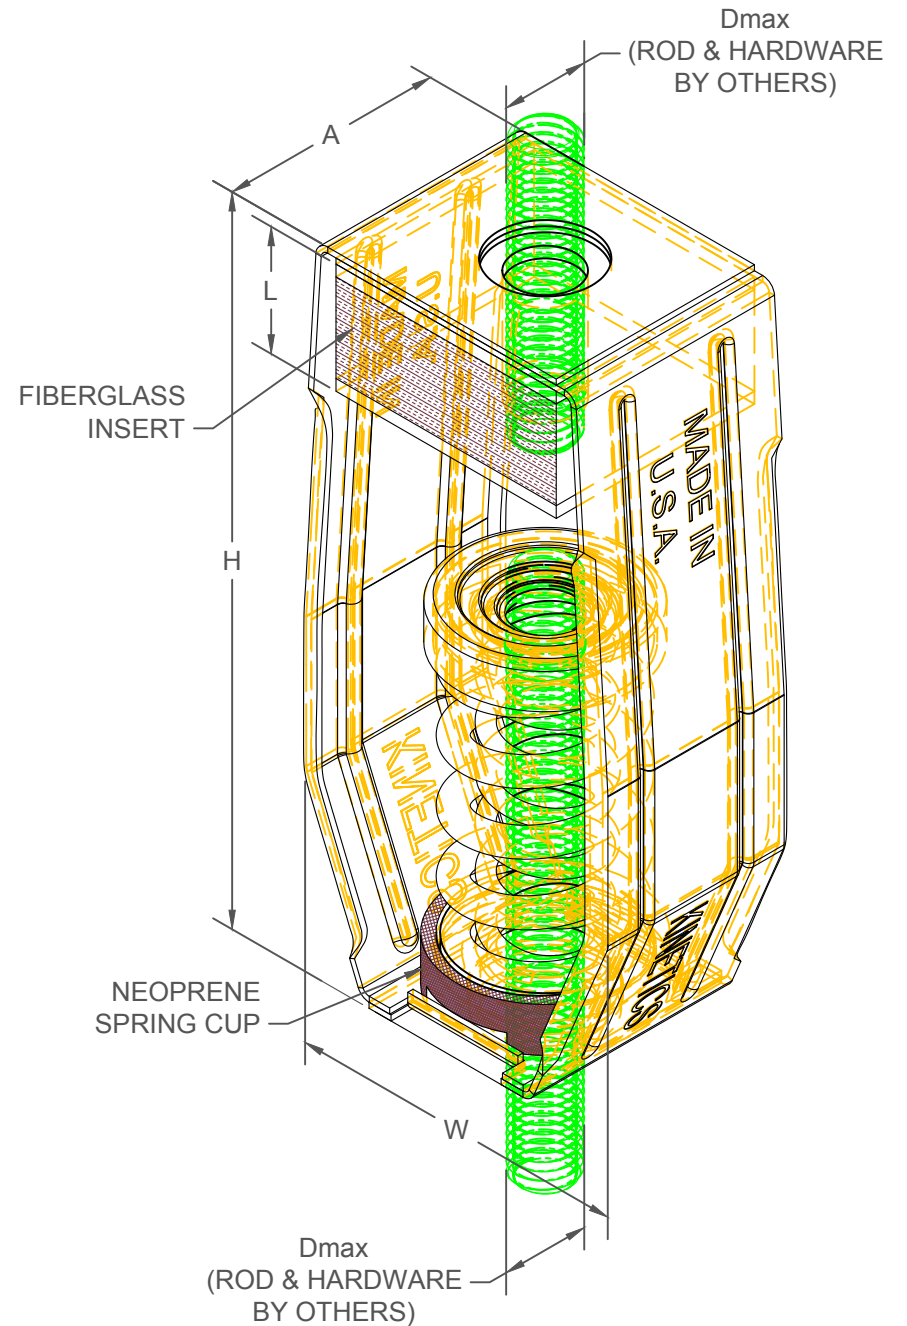

KINETICS NOISE CONTROL, INC
 6300 IRELAN PL,
 DUBLIN, OH 43017 USA
 Ph: 614 889-0480, Fax: 614 889-0540
 www.kineticsnoise.com

Model:
**SFH-1
 35/805**

By: **JMJ**
 Date: **11/03/03**
 Revised: **09/05/14 /BB**

Drawing No:
**S-03.35-11
 METRIC**