


SH 2" DEFLECTION ISOLATION HANGERS

IP UNITS (INCHES AND POUNDS)

TYPE	H	W	A	DMAX
2-2000/3250	12.00	6.00	6.00	1.00

STANDARD RATINGS				SPRING COIL			
TYPE	SIZE	LOAD	DEFL.	COLOR		FREE	
				OUTER	INNER	HT.	O.D.
SH	2-2000	2000	2.00	ORANGE		7.00	5.00
SH	2-2500	2500	2.00	BLUE		7.00	5.00
SH	2-2750	2750	2.00	BLUE	BLUE	7.00	5.00
SH	2-3025	3025	2.02	BLUE	GREEN	7.00	5.00
SH	2-3250	3250	2.00	BLUE	BLACK	7.00	5.00

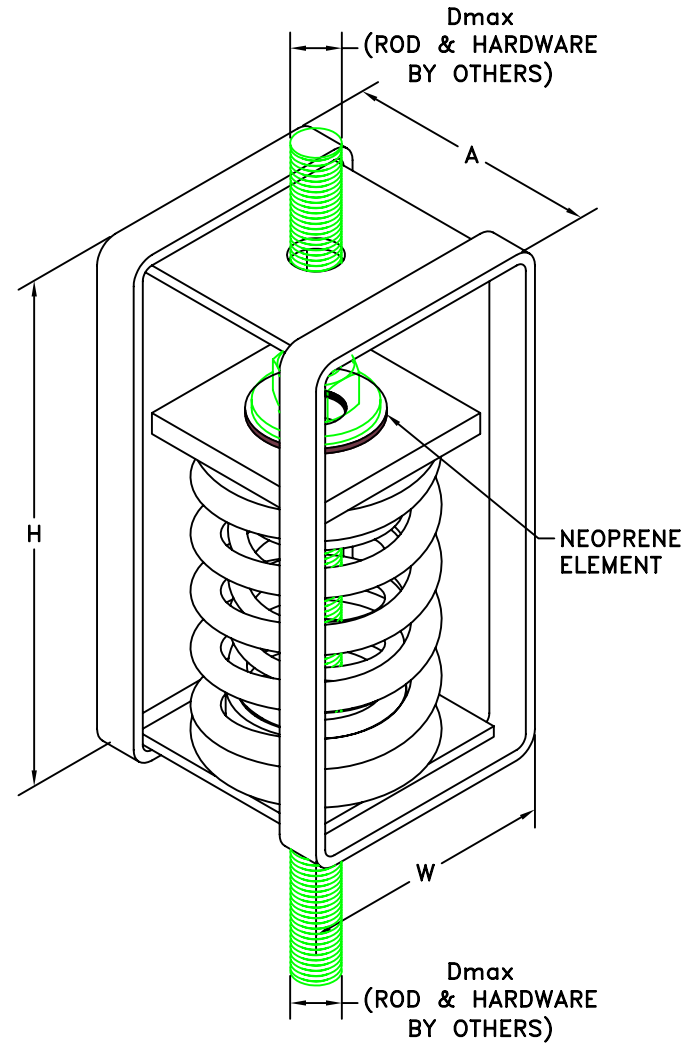

SPECIFICATIONS:

- SPRING ELEMENTS ARE POWDER COATED.
- BRACKETS AND LOAD PLATES ARE PAINTED.
- ISOLATION HANGERS HAVE A TYPICAL OVERLOAD OF 50%.
- ISOLATION HANGERS HAVE A MINIMUM Kx/Ky RATIO OF 1.0.
- SPRING ELEMENTS ARE SAFE AT SOLID LOADING.
- HANGER BRACKETS WILL CARRY (5) TIMES OVERLOAD WITHOUT FAILURE.
- HANGER BRACKETS WILL ALLOW 30° ROD MISALIGNMENT WITHOUT SHORT CIRCUITING.



KINETICS NOISE CONTROL, INC
 6300 IRELAN PL,
 DUBLIN, OH 43017 USA
 Ph: 614 889-0480, Fax: 614 889-0540
 www.kineticsnoise.com

Model:
 SH
 2-2000/3250

By: BB
 Date: 12/07/05
 Revised: /


Drawing No:
 S-03.36-23

SH 51 mm DEFLECTION ISOLATION HANGERS

S-I UNITS (mm AND kg)


TYPE	H	W	A	DMAX
2-2000/3250	305	152	152	25

STANDARD RATINGS				SPRING COIL			
TYPE	SIZE	LOAD	DEFL.	COLOR		FREE	O.D.
				OUTER	INNER	HT.	
SH	2-2000	907	51	ORANGE		178	127
SH	2-2500	1134	51	BLUE		178	127
SH	2-2750	1247	51	BLUE	BLUE	178	127
SH	2-3025	1372	51	BLUE	GREEN	178	127
SH	2-3250	1474	51	BLUE	BLACK	178	127

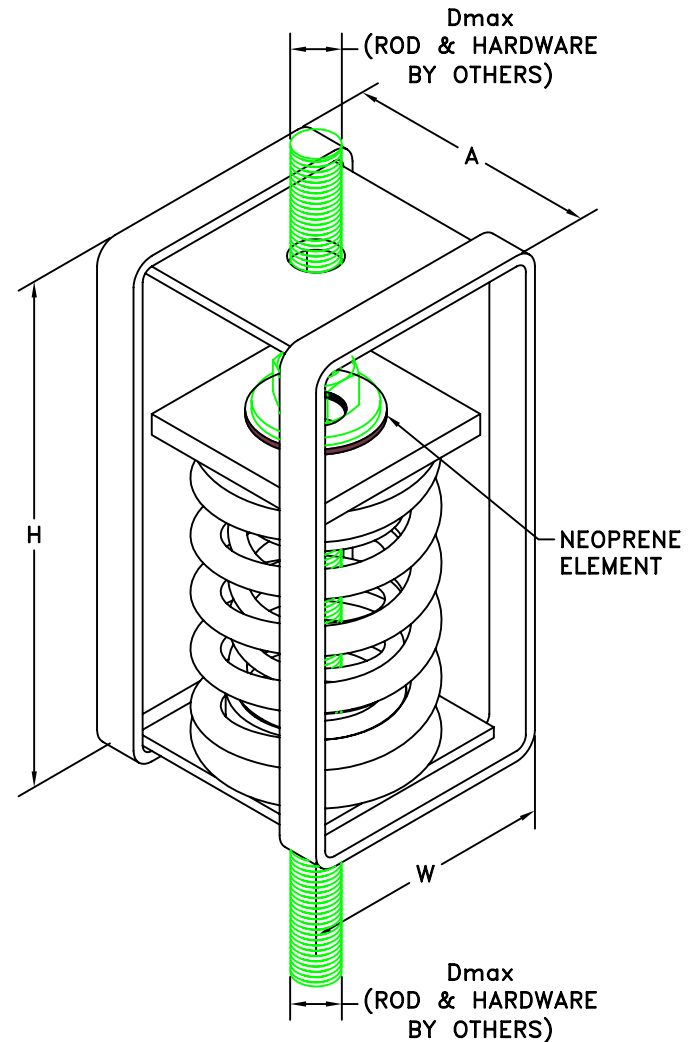

SPECIFICATIONS:

- SPRING ELEMENTS ARE POWDER COATED.
- BRACKETS AND LOAD PLATES ARE PAINTED.
- ISOLATION HANGERS HAVE A TYPICAL OVERLOAD OF 50%.
- ISOLATION HANGERS HAVE A MINIMUM Kx/Ky RATIO OF 1.0.
- SPRING ELEMENTS ARE SAFE AT SOLID LOADING.
- HANGER BRACKETS WILL CARRY (5) TIMES OVERLOAD WITHOUT FAILURE.
- HANGER BRACKETS WILL ALLOW 30° ROD MISALIGNMENT WITHOUT SHORT CIRCUITING.

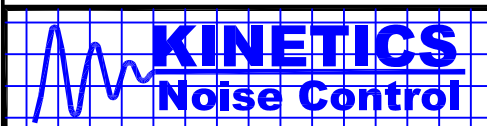

KINETICS NOISE CONTROL, INC
6300 IRELAN PL,
DUBLIN, OH 43017 USA
Ph: 614 889-0480, Fax: 614 889-0540
www.kineticsnoise.com

Model:
SH
2-2000/3250

By: BB
Date: 12/07/05
Revised: /

Drawing No:
S-03.36-23
METRIC