


SRH 51 mm DEFLECTION ISOLATION HANGERS

S-I UNITS (mm AND kg)

TYPE	L	H	W	A	D _{MAX}
2-35/220	44	187	94	57	16

STANDARD RATINGS				SPRING COIL			INSERT COLOR
TYPE	SIZE	LOAD	DEFL.	COLOR	FREE HT.	O.D.	
SRH	2-35	16	53	BLUE	105	44	BLACK
SRH	2-70	32	56	GREEN	105	44	BLACK
SRH	2-120	54	59	GRAY	105	44	BLACK
SRH	2-220	100	58	BROWN	105	44	GREEN

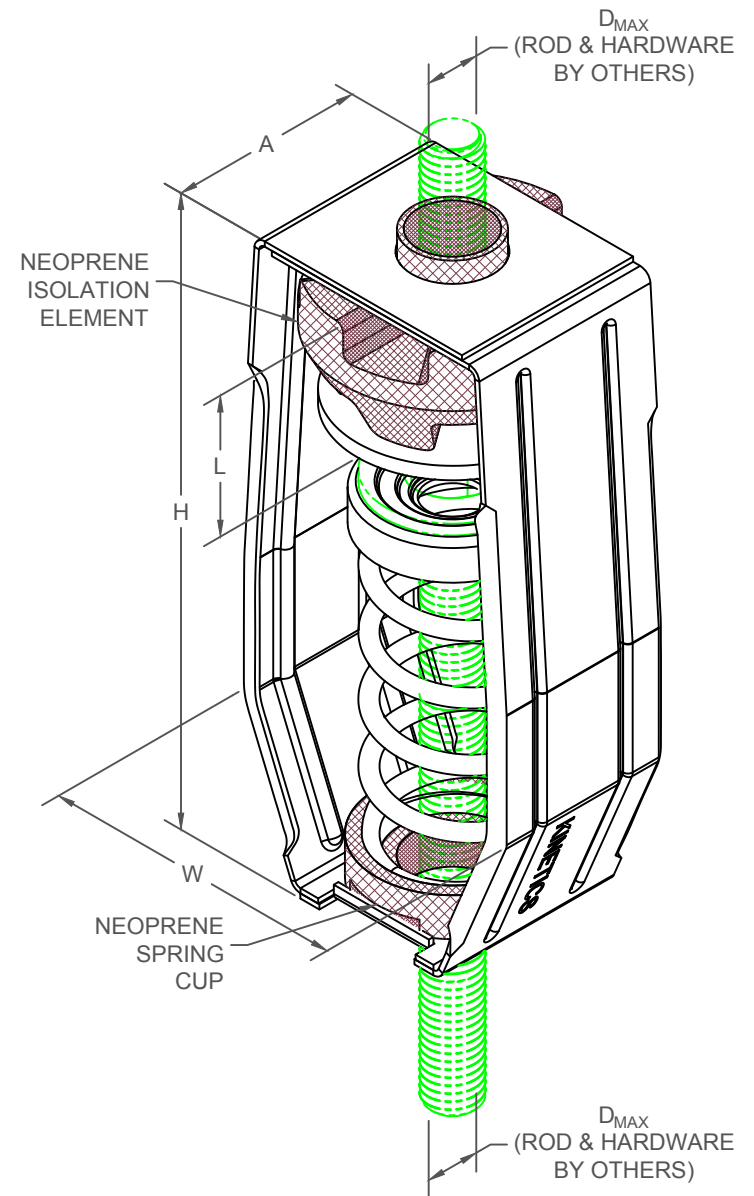

- ISOLATION HANGERS INCORPORATE "NO SHORT" STEP SPRING CAP.
- ISOLATION HANGERS HAVE A MINIMUM K_x/K_y OF 1.1.
- SPRING ELEMENTS ARE SAFE FOR SOLID LOADING.
- HANGER BRACKET WILL CARRY (5) TIMES OVERLOAD WITHOUT FAILURE.
- HANGER BRACKET WILL ALLOW 30° ROD MISALIGNMENT WITHOUT SHORT CIRCUITING.
- SPRING AND BRACKET ARE POWDER COATED. ALL OTHER STEEL COMPONENTS ARE BRIGHT ZINC PLATED.



KINETICS NOISE CONTROL, INC
 6300 IRELAN PL,
 DUBLIN, OH 43017 USA
 Ph: 614 889-0480, Fax: 614 889-0540
 www.kineticsnoise.com

Model:
SRH-2-35/220

By: **JMJ**
 Date: **02/26/03**
 Revised: **02/11/13 /BB**

Drawing No:
S-03.37-21
METRIC