


# SRH 51 mm DEFLECTION ISOLATION HANGERS

S-I UNITS (mm AND kg)

TYPE	L	H	W	A	D <sub>max</sub>
2-260/1200	51	218	142	92	22

STANDARD RATINGS				SPRING COIL			INSERT COLOR
TYPE	SIZE	LOAD	DEFL.	COLOR	FREE HT.	O.D.	
SRH	2-260	118	56	BLUE	107	76	GREEN
SRH	2-465	211	51	GREEN	107	76	WHITE
SRH	2-720	327	53	BLACK	107	76	PURPLE
SRH	2-850	386	50	WHITE	108	76	YELLOW
SRH	2-1025	465	51	BEIGE	108	76	YELLOW
SRH	2-1200	544	51	CHROME	114	76	YELLOW

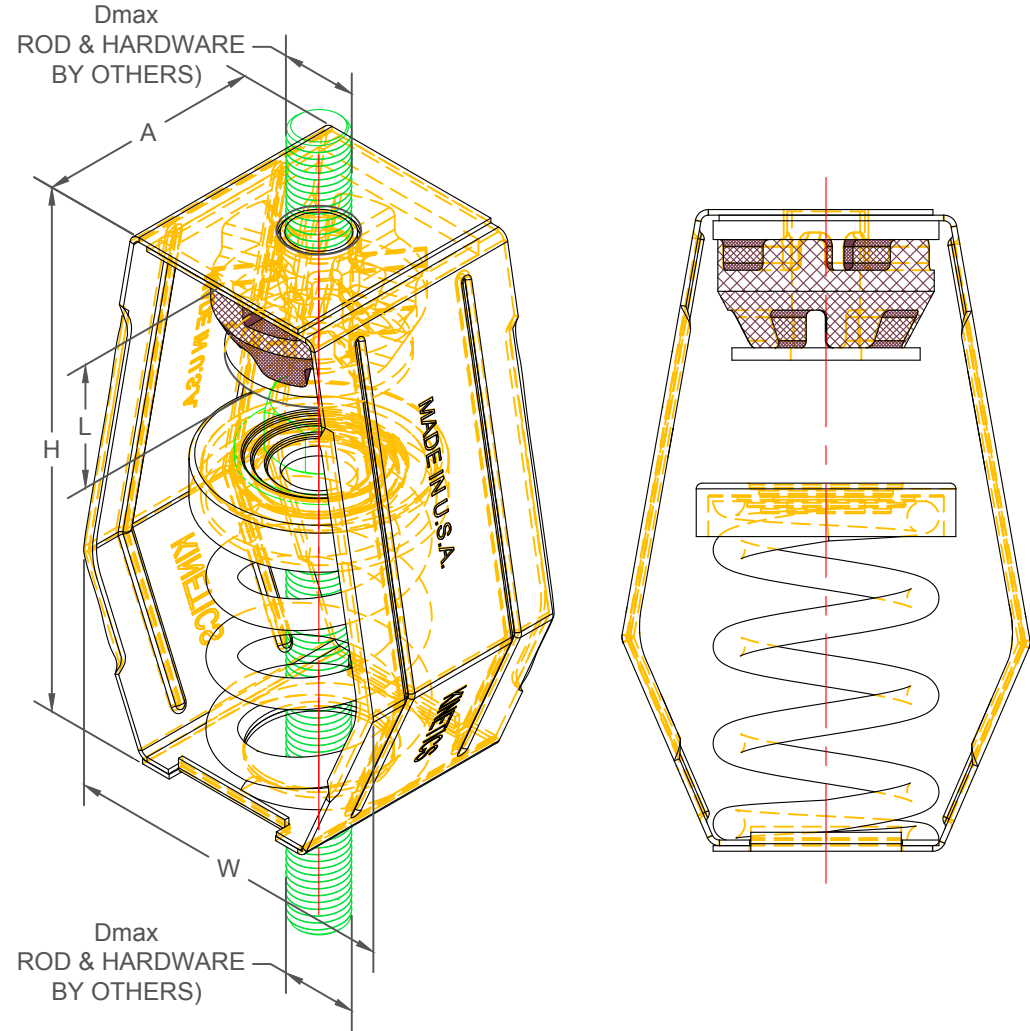

**SPECIFICATIONS:**

- SPRING ELEMENTS AND BRACKETS ARE POWDER COATED.
- LOAD PLATES ARE BRIGHT ZINC PLATED.
- ISOLATION HANGERS HAVE A MINIMUM K<sub>x</sub>/K<sub>y</sub> RATIO OF 1.1.
- SPRING ELEMENTS ARE SAFE AT SOLID LOADING.
- HANGER BRACKETS WILL CARRY (5) TIMES OVERLOAD WITHOUT FAILURE.
- HANGER BRACKETS WILL ALLOW 30° ROD MISALIGNMENT WITHOUT SHORT CIRCUITING.
- "NO SHORT" STEP CAP.



KINETICS NOISE CONTROL, INC  
 6300 IRELAN PL,  
 DUBLIN, OH 43017 USA  
 Ph: 614 889-0480, Fax: 614 889-0540  
 www.kineticsnoise.com

Model:  
 SRH  
 2-260/1200

By: BB  
 Date: 11/03/04  
 Revised: 07/22/15 / BB

Drawing No:  
 S-03.37-22  
 METRIC