


SRH 102 mm DEFLECTION ISOLATION HANGERS

S-I UNITS (mm AND kg)

TYPE	L	H	W	A	B	Dmax
4-100/1600	81	406	238	102	152	22

STANDARD RATINGS				SPRING COIL			
TYPE	SIZE	LOAD	DEFL.	COLOR	HT.	O.D.	INSERT COLOR
SRH	4-100	45	104	GRAY	254	143	WHITE
SRH	4-250	113	107	BLUE	254	143	WHITE
SRH	4-500	227	105	GREEN	254	143	YELLOW
SRH	4-750	340	107	BLACK	254	143	YELLOW
SRH	4-1000	454	109	RED	254	143	YELLOW
SRH	4-1250	567	111	BROWN	254	143	YELLOW
SRH	4-1600	726	111	ORANGE	254	143	PINK

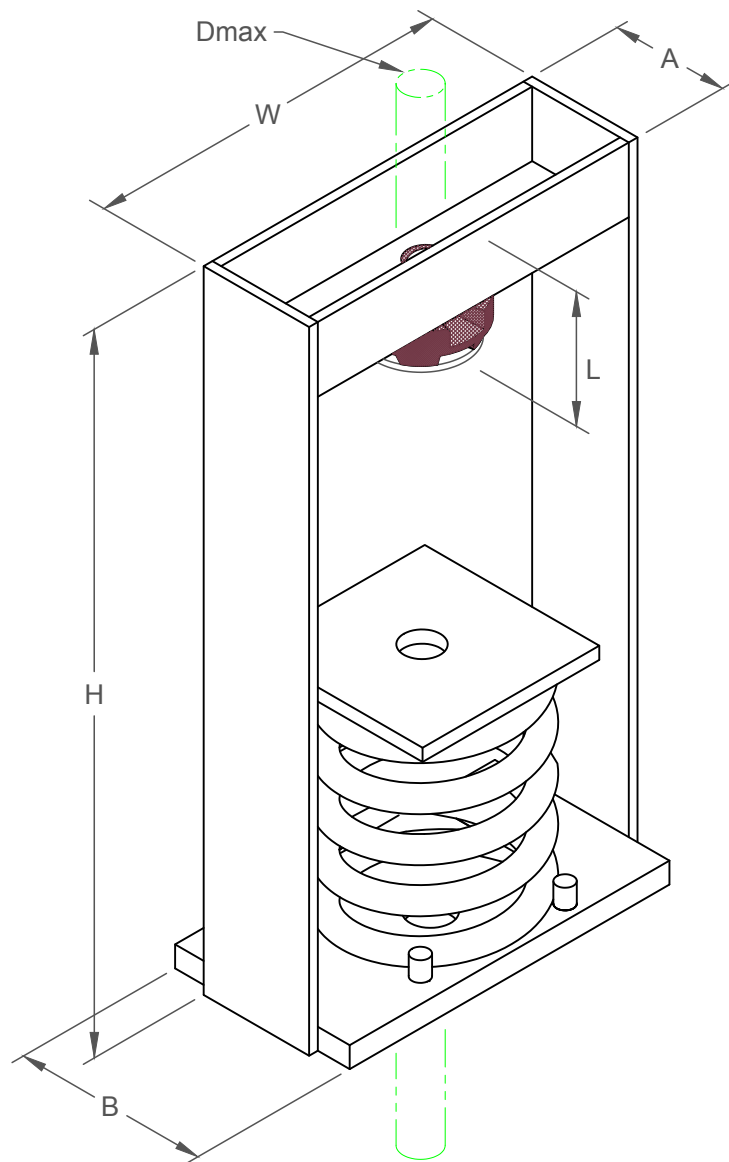

SPECIFICATIONS:

- SPRING ELEMENTS AND BRACKETS ARE POWDER COATED
- LOAD PLATES ARE BRIGHT ZINC PLATED
- ISOLATION HANGERS HAVE A MINIMUM Kx/Ky RATIO OF 1.2
- SPRING ELEMENTS ARE SAFE AT SOLID LOADING
- HANGER BRACKETS WILL CARRY (5) TIMES OVERLOAD WITHOUT FAILURE
- HANGER BRACKETS WILL ALLOW 30° ROD MISALIGNMENT WITHOUT SHORT CIRCUITING