



NOTE:
ALL DIMENSIONS SHOWN IN
INCHES AND MILLIMETERS.

MODEL	SPRING COLOR	RATED LOAD		RATED DEFLECTION		DIMENSIONS									
		(LB)	(KG)	(IN)	(MM)	A		B		C		D		E	
						(IN)	(MM)	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)	(IN)	(MM)
SPH-2-35	BLUE	35	16	2.00	51	3.69	94	7.38	187	2.25	57	0.50	13	4.13	105
SPH-2-70	GREEN	70	32	2.00	51	3.69	94	7.38	187	2.25	57	0.50	13	4.13	105
SPH-2-120	GRAY	120	54	2.00	51	3.69	94	7.38	187	2.25	57	0.50	13	4.13	105
SPH-2-220	BROWN	220	100	2.00	51	3.69	94	7.38	187	2.25	57	0.50	13	4.13	105

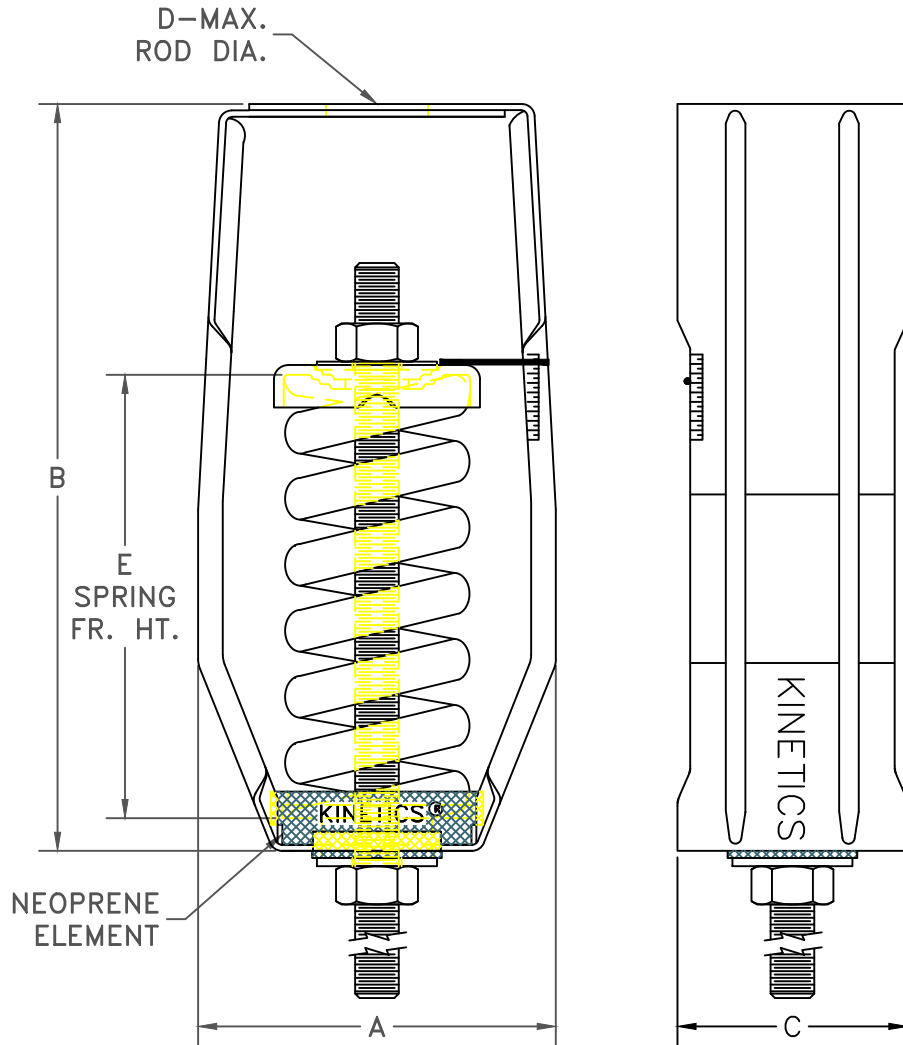

SPH-2 ISOLATION HANGERS HAVE A MINIMUM K_x/K_y OF 1.1.
 SPH-2 SPRING ELEMENTS ARE SAFE FOR SOLID LOADING.
 SPH-2 HANGER BRACKETS WILL CARRY (5) TIMES OVERLOAD WITHOUT FAILURE.
 SPH-2 HANGER BRACKETS WILL ALLOW 30° ROD MISALIGNMENT WITHOUT SHORT
 CIRCUITING.
 SPH-2 SPRING ELEMENTS AND BRACKETS ARE POWDER COATED. LOAD PLATES
 ARE BRIGHT ZINC PLATED.

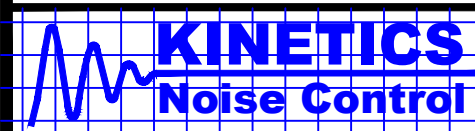

TITLE
MODEL SPH-2 HANGER

LAST DATE
REVISED
12/04/02

REVISED BY
BB

DRAWING NO.
S-03.46-2A

S-03