


NOTE:
ALL DIMENSIONS SHOWN IN
INCHES AND MILLIMETERS.

MODEL	SPRING COLOR	RATED LOAD LB/KG	RATED DEFLECTION IN/MM	DIMENSIONS IN INCHES / MILLIMETERS					
				A IN/MM	B IN/MM	C IN/MM	D IN/MM	E IN/MM	F IN/MM
SRPH-1-2200	ORANGE/GRAY	2200/998	1.36/32	5.00/127	9.50/241	4.75/121	.88/22	4.00/102	1.86/47
SRPH-1-2465	BLUE	2465/1118	1.42/33	5.00/127	9.50/241	4.75/121	.88/22	4.00/102	1.86/47
SRPH-1-2865	BLUE/GRAY	2865/1300	1.20/34	5.00/127	9.50/241	4.75/121	.88/22	4.00/102	1.86/47
SRPH-1-3500	BLUE/BROWN	3500/1588	1.18/30	5.00/127	9.50/241	4.75/121	.88/22	4.00/102	1.86/47

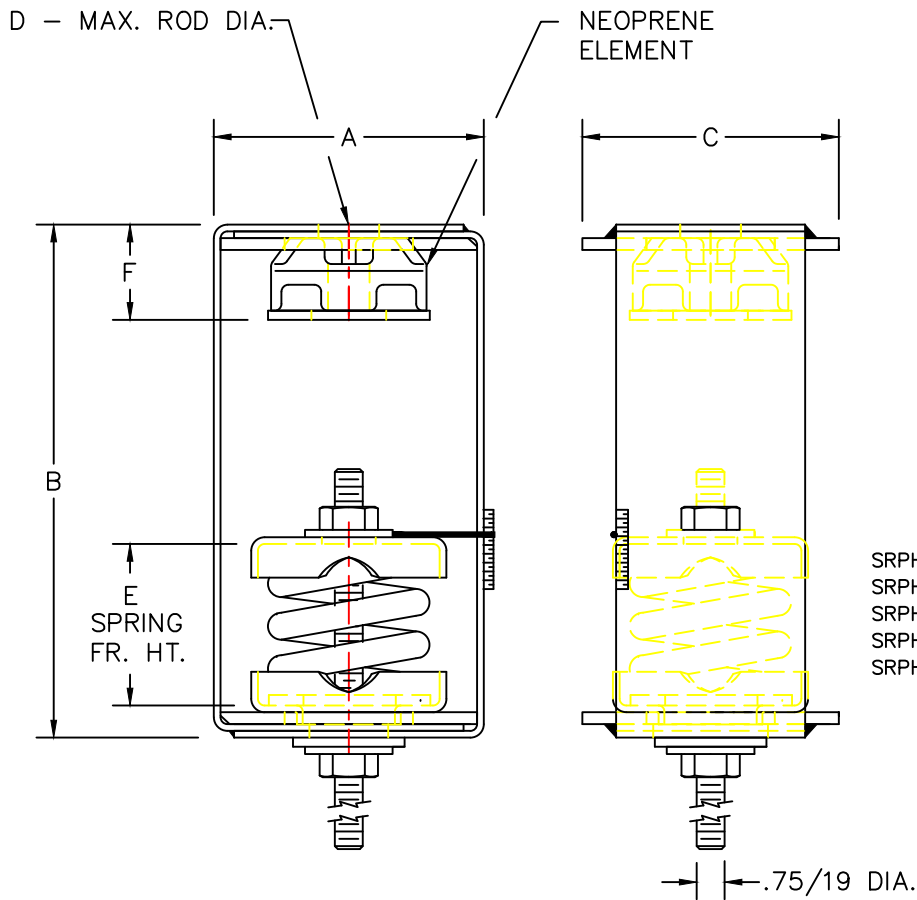

SRPH-1 ISOLATION HANGERS HAVE A MINIMUM K_x/K_y OF 1.0
 SRPH-1 SPRING ELEMENTS ARE SAFE FOR SOLID LOADING
 SRPH-1 HANGER BRACKETS WILL CARRY (5) TIMES OVERLOAD WITHOUT FAILURE
 SRPH-1 HANGER BRACKETS WILL ALLOW 30° ROD MISALIGNMENT WITHOUT SHORT CIRCUITING
 SRPH-1 SPRING ELEMENTS AND BRACKETS ARE POWDER COATED. LOAD PLATES ARE BRIGHT ZINC PLATED.

NOTE:
ALL THREADED MEMBERS ARE AMERICAN STANDARD.



TITLE
MODEL SRPH-1 HANGER

LAST DATE
REVISED
10/02/96

DRAWN BY
DW

DRAWING NO.
S-03.47-1D