


MODEL	RATED LOAD LB/KG	SPRING COLOR	RATED DEFLECTION IN/MM	DIMENSIONS IN INCHES/MILLIMETERS							
				A IN/MM	B IN/MM	C IN/MM	D IN/MM	E IN/MM	F IN/MM	G IN/MM	H IN/MM
SRPH-4-2250	2250/1023	BEIGE	4.10/104	13.5/343	18.5/470	8.00/203	.88/22	11.5/292	3.44/87	6.00/152	.75/19
SRPH-4-2500	2500/1136	BEIGE/BLUE	4.15/105	13.5/343	18.5/470	8.00/203	.88/22	11.5/292	3.44/87	6.00/152	.75/19
SRPH-4-2750	2750/1250	BEIGE/GREEN	4.20/107	13.5/343	18.5/470	8.00/203	.88/22	11.5/292	3.44/87	6.00/152	.75/19

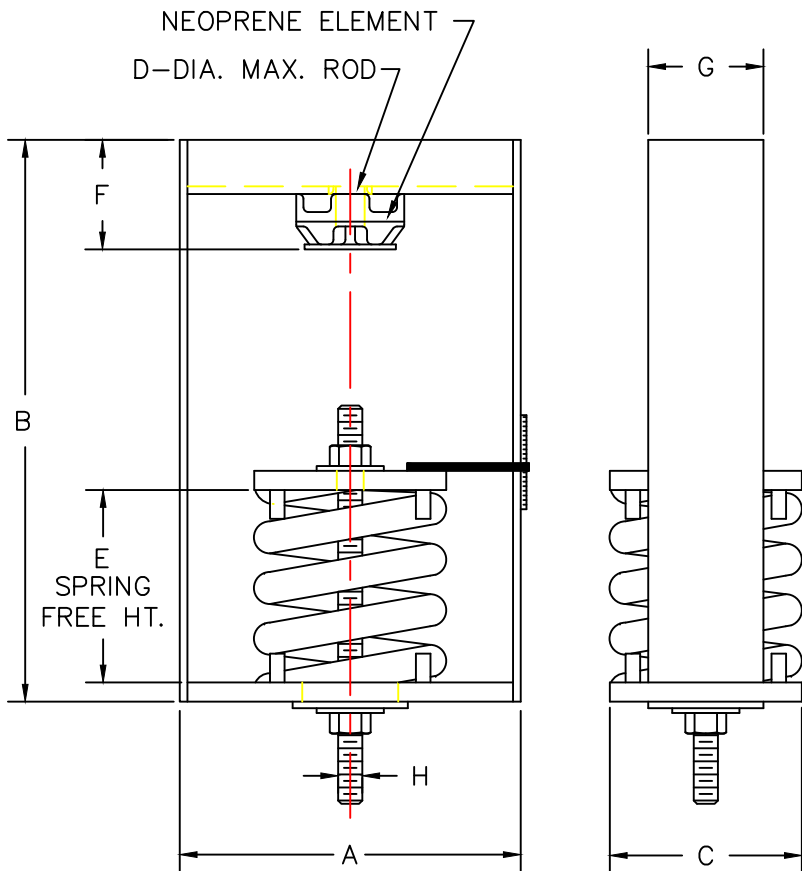

- SRPH-4 ISOLATION HANGERS HAVE A MINIMUM  $K_x/K_y$  OF 1.2
- SRPH-4 ISOLATION HANGERS HAVE A TYPICAL OVERLOAD CAPACITY OF 50%
- SRPH-4 SPRING ELEMENTS ARE SAFE FOR SOLID LOADING
- SRPH-4 HANGER BRACKETS WILL CARRY (5) TIMES OVERLOAD WITHOUT FAILURE
- SRPH-4 HANGER BRACKETS WILL ALLOW 30° ROD MISALIGNMENT WITHOUT SHORT CIRCUITING
- SRPH-4 SPRING ELEMENTS AND BRACKETS ARE PAINTED
- SRPH-4 RATED DEFLECTION IS SPRING DEFLECTION PLUS PRORATED NEOPRENE DEFLECTION
- SRPH-4 NEOPRENE ELEMENTS ARE DESIGNED FOR .38° DEFLECTION AT MAXIMUM LOAD

NOTE:  
ALL THREADED MEMBERS ARE AMERICAN STANDARD.