
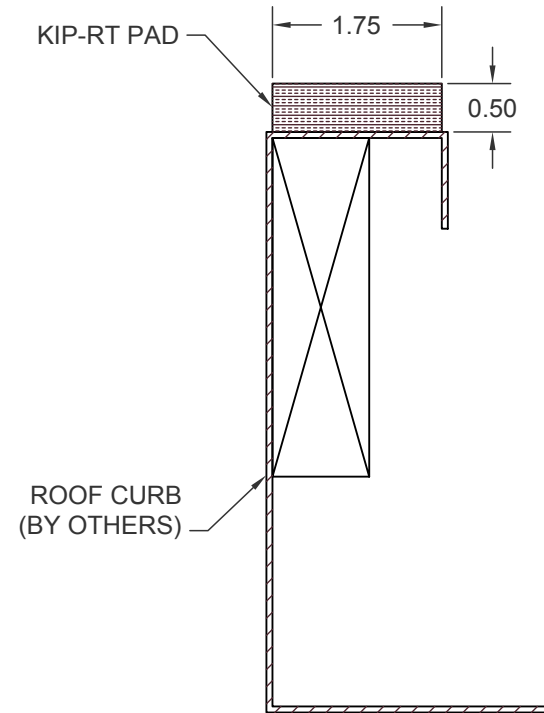


NOTE:

ENLARGED PORTION OF CURVE INDICATES LOAD RANGE FOR STEADY STATE LOADS.
 FOR IMPACT OR SHOCK LOADS, REDUCE THIS LOADING BY 50%.

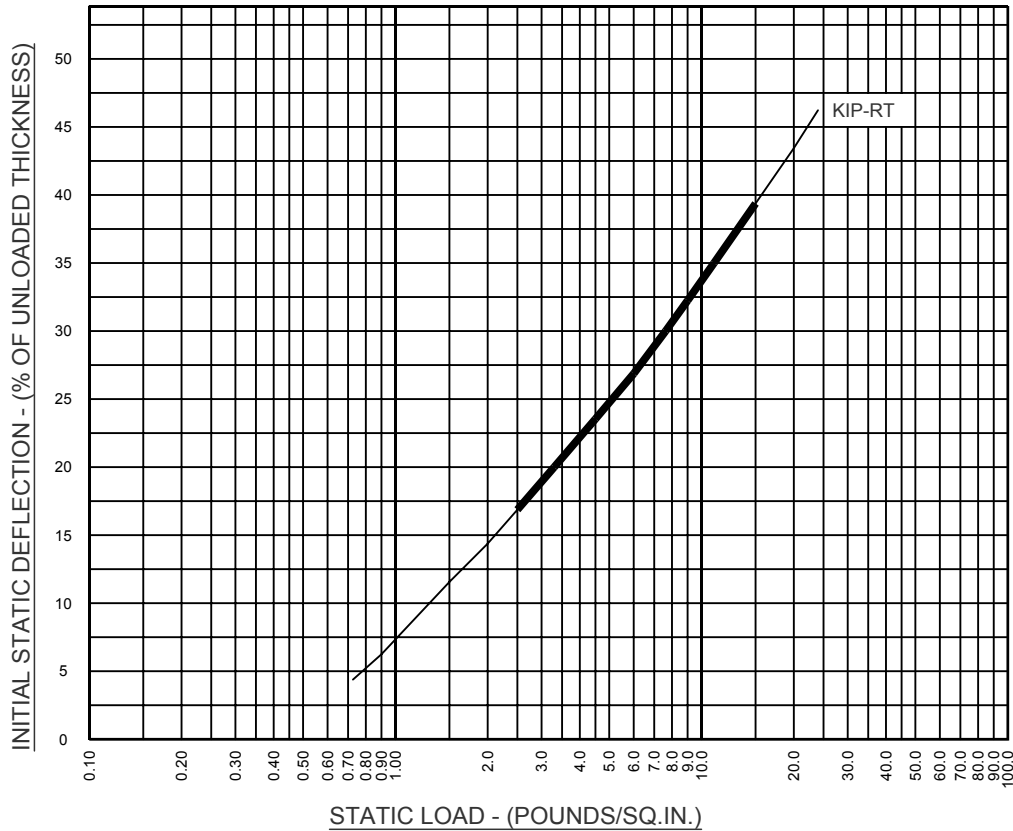

CURB CROSS SECTION

*** NOTE:**

FIBER GLASS PAD IS SUPPLIED IN 48 INCH LONG LENGTHS.
 FIELD CUT TO FIT TOP OF CURB, AND ADHERE FIBER GLASS
 PAD TO CURB WITH A MASTIC ADHESIVE. (I.E., "LIQUID NAILS"
 OR SIMILAR). EXPOSED CUT EDGES OF FIBER GLASS ARE TO
 BE SEALED WITH A HIGH QUALITY SILICONE CAULK. ADHESIVE
 AND CAULK TO BE PROVIDED BY OTHERS.



KINETICS NOISE CONTROL, INC
 6300 IRELAN PL,
 DUBLIN, OH 43017 USA
 Ph: 614 889-0480, Fax: 614 889-0540
 www.kineticsnoise.com

Model:
**KIP-RT ROOFTOP
 FIBERGLASS PAD**

By: **BB**
 Date: **03/01/04**
 Revised: **09/30/15 / BB**

Drawing No:
S-21.00-5A