



SportsBoard Conform

ACOUSTICAL WALL PANELS

EXTRAORDINARILY DURABLE AND ATTRACTIVE, SPORTSBOARD CONFORM COPOLYMER PANELS ARE THE ULTIMATE SOLUTION TO REVERBERANT NOISE PROBLEMS IN SPORTS FACILITIES OR OTHER AREAS WHERE IMPACT / ABUSE RESISTANCE, ABRASION RESISTANCE, AND CLEANABILITY ARE IMPORTANT. THE PERFORATED COPOLYMER TAKES A HIT WITHOUT DAMAGE AND WIPES CLEAN WITH A SPONGE AND ISOPROPYL ALCOHOL.

Looking for an extraordinarily durable and attractive acoustical panel to specify for a sports facility? Consider **SportsBoard Conform**. Able to withstand direct hits with a baseball without damage, this panel is the ideal solution for reverberant noise control problems in abuse prone areas.

SportsBoard Conform offers superior acoustical performance but with the added durability of a perforated copolymer facing which is molded to cover all panel edges. Easy to install and easy to clean, this panel is ideal for areas where impacts and abuse are expected.

SportsBoard Conform panels are constructed from 6-7 PCF fiberglass board with exposed surfaces encapsulated in a 1/16" perforated copolymer. This panel is available in 1" and 2" thicknesses and panel sizes up to 42" x 90", oversized available up to 48" x 120" (minimum order quantities may apply). SportsBoard Conform is available in a variety of colors. The color is integral to the copolymer so it does not scratch off.

SportsBoard Conform / Acoustical Wall Panels

DESCRIPTION

Highly abuse resistant perforated copolymer is molded as a single unit covering the face and edges of the acoustical panel core.

FIRE TEST DATA

Class A per ASTM E84


ACOUSTICAL PERFORMANCE

Sound Absorption per ASTM C-423, Type A Mounting

Frequency (Hz)	125	250	500	1K	2K	4K	NRC
1" Thick	0.04	0.31	0.79	1.09	1.13	1.00	0.85
2" Thick	0.32	0.90	1.18	1.20	1.17	1.07	1.10

COMPOSITION

- 6-7 PCF fiberglass core
- 1/16" perforated copolymer facing
- Panels available in 1" and 2" thicknesses
- See website for standard color options (custom colors available)
- Panels available in standard sizes up to 42" x 90", oversized available up to 48" x 120" (minimum order quantities may apply)

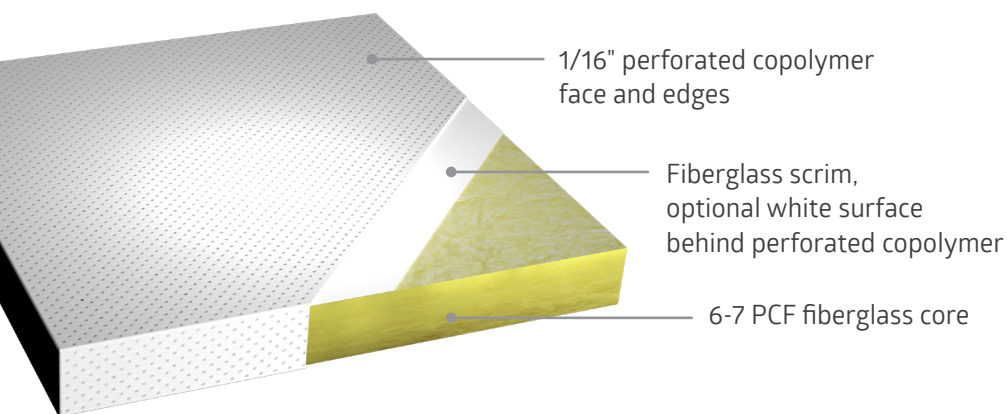

APPLICATIONS

- High traffic / high abuse areas
- Gymnasiums and sports facilities
- Schools and universities
- Prisons
- Recreation centers

MOUNTING

- HardSide impaling clips with adhesive
- Z-Clips (movable)

Note:

The copolymer material expands and contracts with temperature variation. Install panels with a minimum 1/8" gap between abutting edges to allow for expansion.

EDGE OPTIONS

