


**MATERIALS**

PIPE ENDS: COPPER, FEMALE  
 CORRUGATED HOSE: BRONZE WITH BRAIDED  
 BRONZE SHEATH

NOM SIZE	NOMINAL LENGTH-L	PERMANENT LATERAL OFFSET	WORKING PRES.-PSI (BAR)		APPROX SHIP WEIGHT
			70 deg F	300 deg F	
1/2 x 10	10 (254)	1.00 (25)	450 (31)	374 (26)	1.0 (0.5)
3/4 x 10	10 (254)	0.75 (19)	340 (23)	282 (19)	1.0 (0.5)
1 x 10	10 (254)	0.50 (13)	302 (21)	250 (17)	1.0 (0.5)
1 1/4 x 10	10 (254)	0.38 (10)	280 (19)	232 (16)	2.0 (0.9)
1 1/2 x 12	12 (305)	0.38 (10)	245 (17)	203 (14)	3.0 (1.4)
2 x 14	14 (356)	0.38 (10)	190 (13)	157 (11)	5.0 (2.3)

PSI (BAR)      PSI (BAR)      LBS (KG)

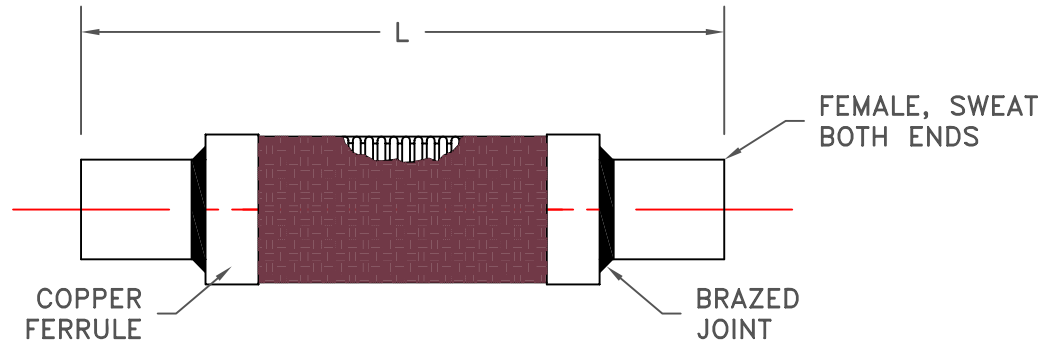

KINFLEX BFMC-CFE

ALL DIMS IN INCHES (MM) EXCEPT AS NOTED

TAG	QTY	PIPE SIZE

**WARNING: Control Units Must Be Used To Protect This Part From Excessive Movement If Piping Is Not Properly Anchored. Precautions Should Be Taken To Protect Personnel In The Event Of Leakage Or Splash.**

Proposal/Inquiry/Order Number:

Customer Name:

Project Name:

Architect/Engineer:

Contractor:

DATE:

REMARKS:

Drawn By: BSB      Date: 02/06/03      Approved By:

Checked By:      Scale: None



Drawing No.:

S-05.05-01M